




ADT2000 – Audio Control

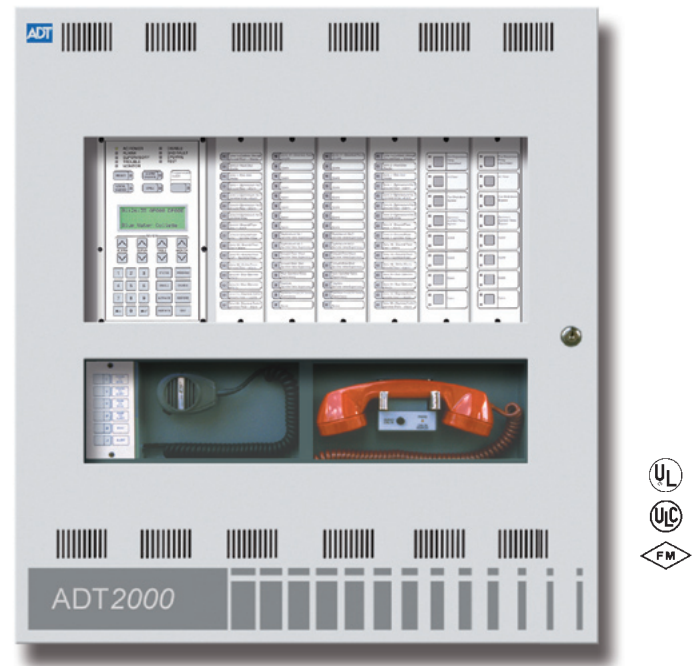

Overview

ADT2000 Audio Fire Alarm is modular in design. Audio control panels provide all the features of ADT2000 with the added benefit of one or two channel audio. Audio cabinets integrate both Fire Alarm control equipment and audio control equipment ensuring both functionality and esthetics. When distributed amplification is needed a single remote mounting audio closet cabinet supports mounting of up to two 50 watt distributed amplifiers in remote locations. For large banked audio applications 125 and 250 watt amplifiers blend perfectly with the ADT2000 audio control.

The ADT2000 audio panel provides an efficient emergency paging, evacuation signaling and firefighters telephone system in perfectly integrated modular packages.

Standard Features

- Uniform system design
- One or two channel audio
Configure with or without Firefighters telephone
- Distributed or banked amplifiers
30 and 50 watt distributed amplifiers; 125 and 250 watt centrally banked amplifiers
- Integral 15 function tone generator
- Page by firefighters telephone
- Signature series detectors and modules supported
- Class B or A Signature data circuit(s)
- 96 detectors and 94 modules per circuit
- Two integral Class A or B notification appliance circuits
- 576 event history log

Application

ADT2000 audio suits applications requiring emergency voice paging and evacuation signaling with or without firefighter's telephone. Single channel or dual channel applications easily configure using Signature distributed amplifiers or ADT centrally banked amplifiers. Distributed amplifiers are available in 30 watt and 50 watt sizes. Centrally banked amplifiers are available in 125 watt and 250 watt sizes.

All ADT2000 audio amplifiers easily configure for 25Vrms or 70Vrms operation through simple jumper selection.


ADT2000 with SIGA Amplifiers:

Signature amplifiers provide Class B or Class A wiring of audio output circuits. Speakers connect directly to the output of the SIGA amplifier or the amplifier output can run as an audio riser to signature modules where speaker zone selection is made.


Each SIGA amplifier has a built in 1kHz tone generator and provision for a back up amplifier. Should an amplifier lose its input signal the output will switch to a back up amplifier. If there is no back up amplifier or the output from the back up is unavailable the output will receive the internal 1kHz tone as the evacuation signal.

For installations requiring firefighter's telephone, ADT2000 offers a master telephone module that allows communication with remote telephone stations. System paging is available through the front panel master microphone or through remote telephone stations when configured. Six front panel switches allow the emergency user to Page to the EVAC riser, Page to the ALERT riser or quickly place EVAC or ALERT tones on the risers. After a paging operation the system Audio Controller automatically returns to its pre-page state.


Installation and Mounting

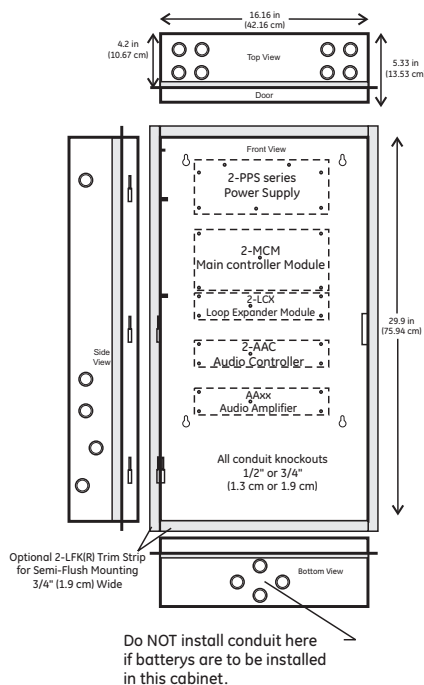

2-WB3

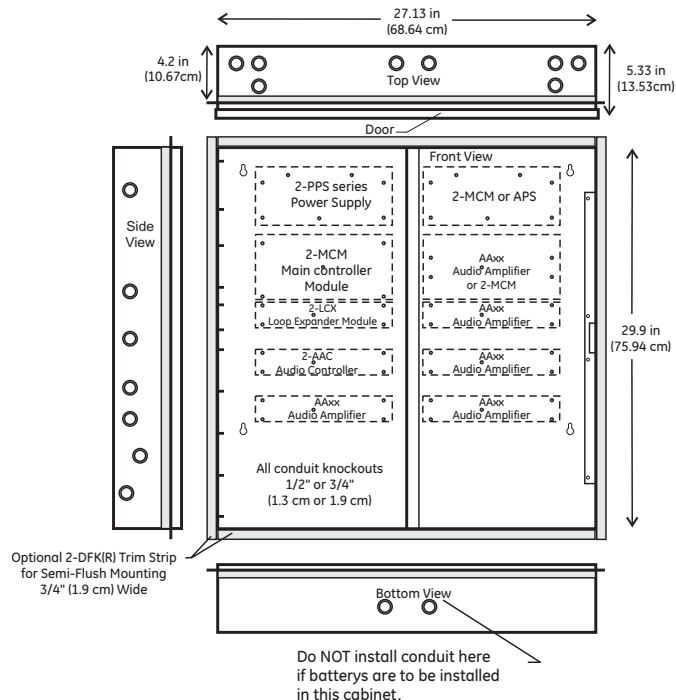


2-WB7

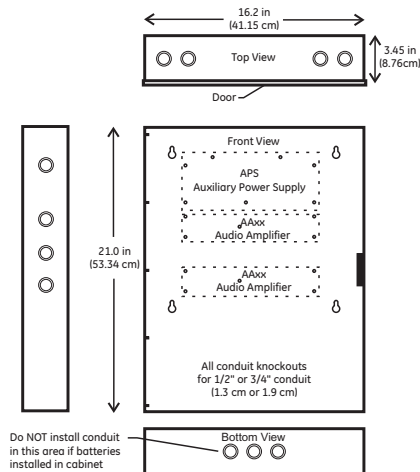


RACC

Typical Zoned Amplifier Wiring

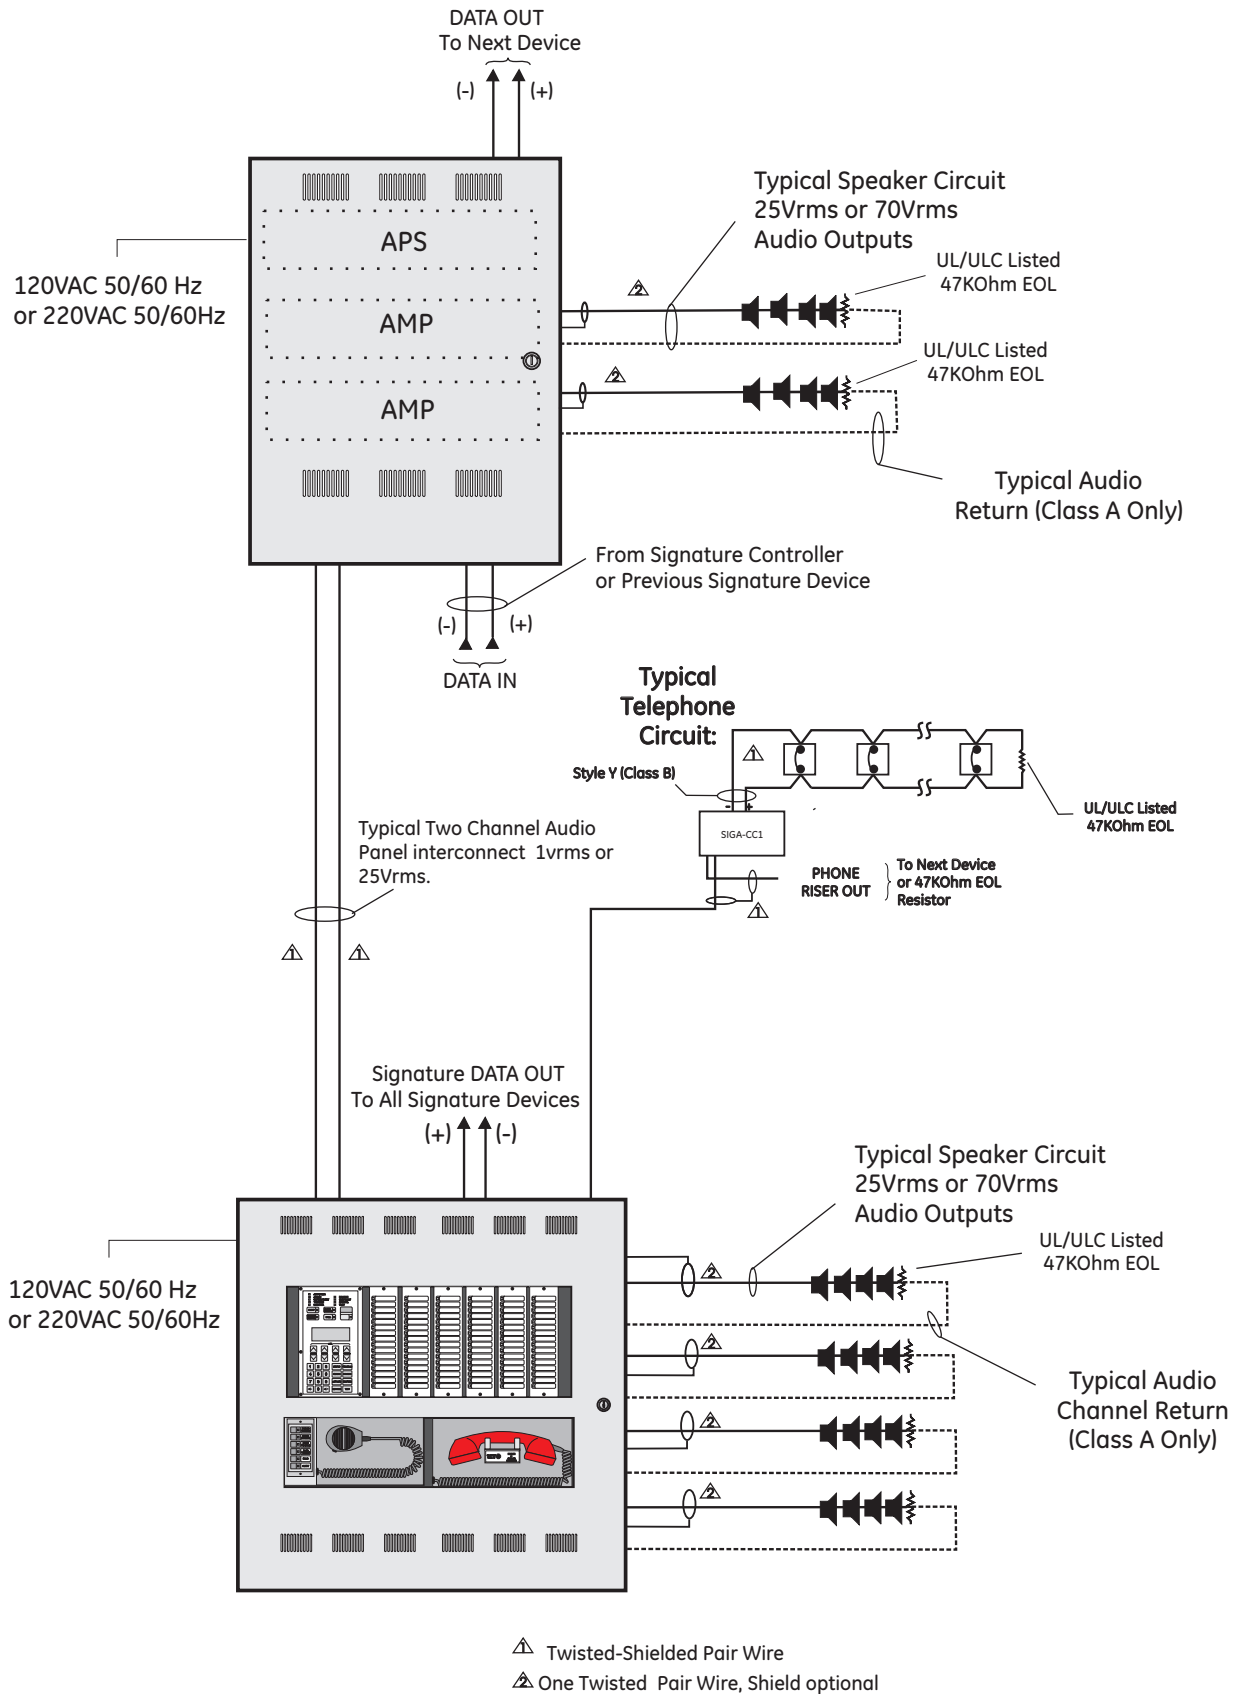

Typical Distributed Banked Amplifier Wiring

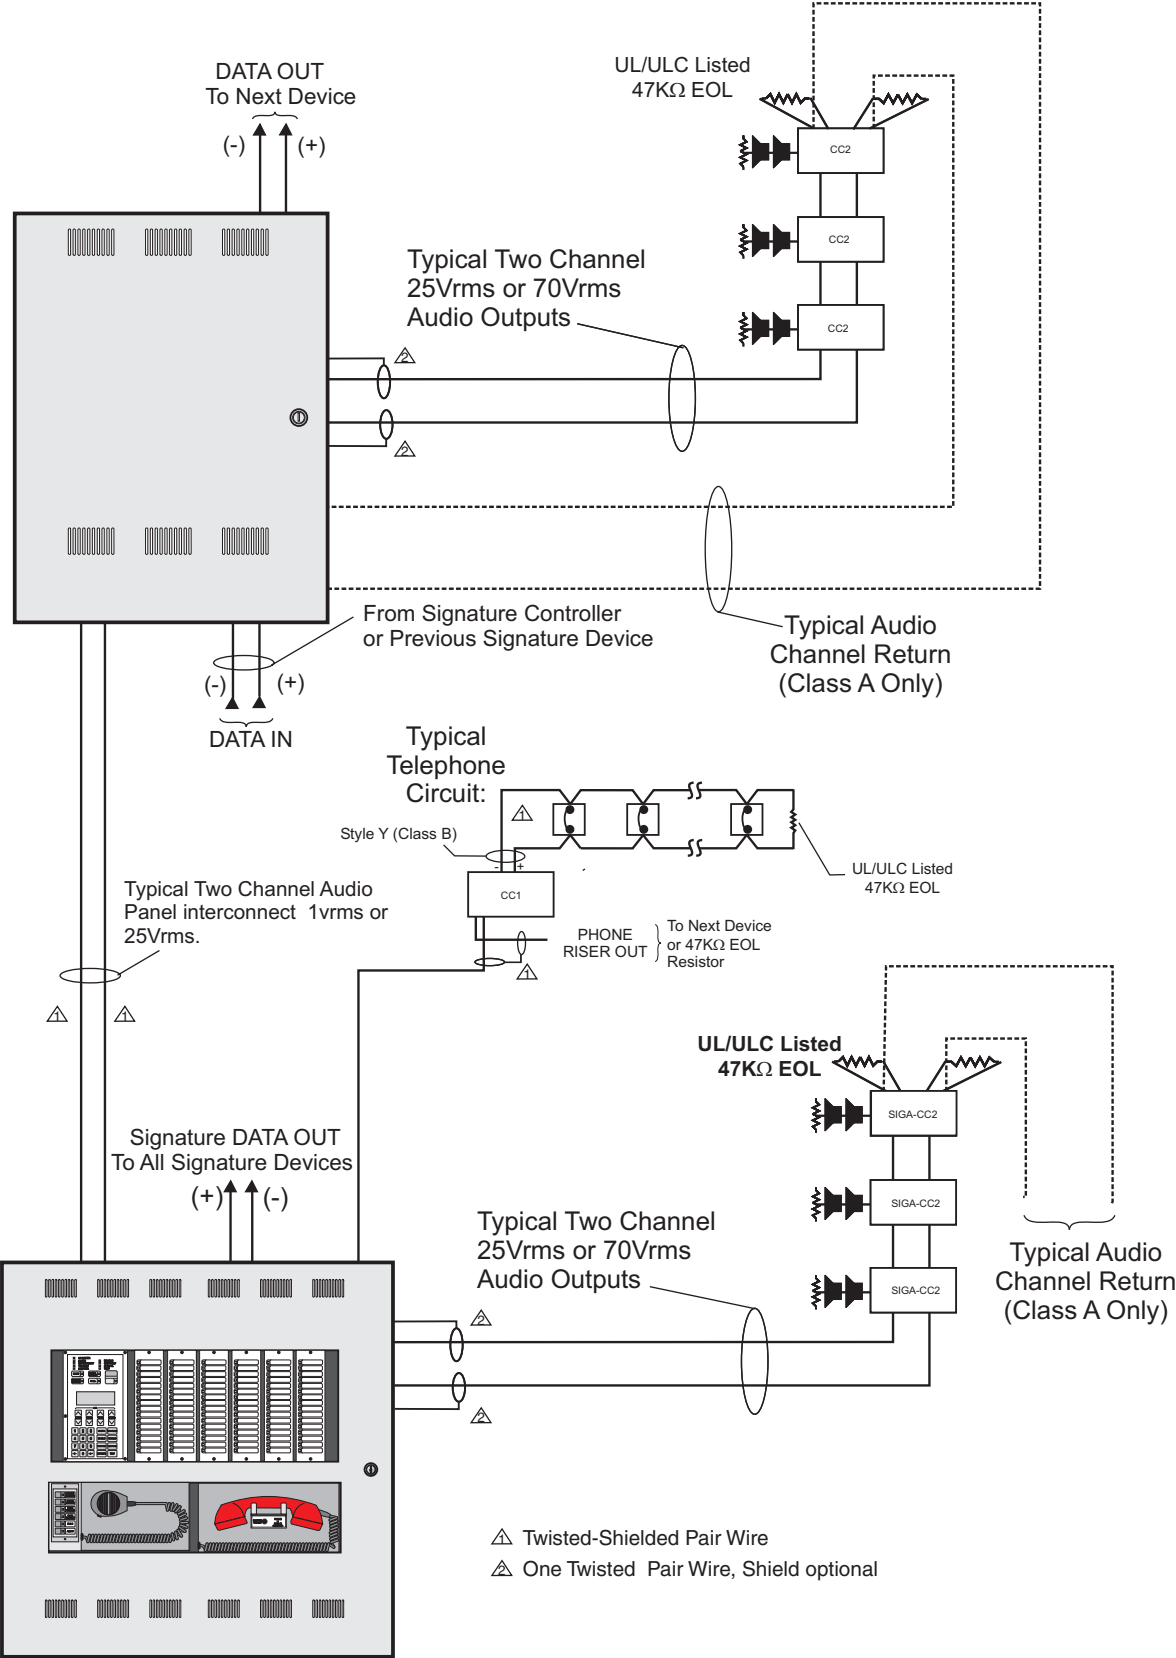

Specifications

Power Supplies	2-PPS	2-PPS/6A	2-PPS/220	2-PPS/6A-220
Notification Appliance Power	3.5 Amps @24 Vdc nominal	Two 3.2 Amp Taps @24 Vdc nominal	3.5 Amps @24 Vdc nominal	Two 3.2 Amp Taps @24 Vdc nominal
Auxiliary Output Power	500mA Max	N/A	500mA Max	N/A
Line Power	120 Vac 300Watts Max, 50/60Hz		220-240 Vac 300 Watts Max, 50/60Hz	
Agency Listings	UL, ULC, FM			
Maximum Battery Size	Two of 12V17A 17 Amp hour in 2-WB3 and RACCR6 Two of 12V17A-17 Amp hour and 2 of 12V10A-10 Amp hour batteries in 2-WB7 (See Note 1)			

Note 1: For applications over 17 Amp hour and up to 24 Amp hour use BC-1R.

Main Controller/Display (2-MCD)

Signature Data Circuit	One Standard. Expandable to two with optional 2-LCX
Devices per SDC	96 Detectors, 94 Modules Maximum - 96 Isolators or Relay Bases
Terminal Wire Gauge	18-12 AWG (0.75-2.5 mm ²)
Relative Humidity	10-93% non condensing
Temperature Rating	0°-49°C (32° - 120°F)
Wiring Styles	Class A or Class B
Standard Auxiliary relays	1 Alarm Contact - 24 Vdc 1Amp; 1 Trouble Contact - 24 Vdc 1Amp; 1 Supervisory Contact - 24 Vdc 1Amp

Audio Control (2-AAC)

Agency Listings	UL, ULC, FM		
Standby Power	24 Vdc @ 65mA, 75mA with 2-TEL		
Active Power	24 Vdc @ 110mA		
Frequency Response	400Hz to 4kHz		
Output Level Distortion Wiring Configuration	Two Audio Outputs Channels 1 Vrms <1% Two Channels Class B or Class A		
Auxiliary Inputs Input Impedance Input Level	Two Electrically Isolated Inputs 10K Ohm 0.5 to 1.75 Vrms		
Loading	15 Signature Amplifiers Max.; 100 Ohm Max. 0.2µF Max.		
Supervision	DC: 47K Ohm EOL or AC Audio Pulse		
Internally Generated Tones	Slow Whoop	1kHz 20 Beats per min.	Low Tone
	1kHz Steady	Fast Whoop	Fast Hi-Lo Tone
	1kHz Morse U	1kHz March Time	4-4 Code
	Chime Hi-Lo	Hi-Lo	1kHz @ 120 Beats per min.
	Horn Temporal (3-3-3)	Horn	
Microphone	Dynamic, Push - to - Talk; 2-MIC mounts on inner door of 2-WB3 or 2-WB7		
Firefighters Telephone	Max. Five remote phones active. 2-TEL mounts on Inner door of 2-WB7		
Relative Humidity	10-93% non condensing		
Temperature Rating	0°-49°C (32° - 120°F)		
Wiring Styles	Class A or Class B		

Ordering Information

Catalog Number	Description	Ship Wt. lb. (kg)
Electronics		
2-MCD	Main Control and Display (add "-CC" for City of Chicago)	1.5 (.7)
2-PPS	4.5 amp power supply 120VAC	2.5 (1.1)
2-PPS/220	4.5 amp power supply 220VAC	2.5 (1.1)
2-PPS/6A	6.4 amp power supply 120VAC	2.5 (1.1)
2-PPS/6A-220	6.4 amp power supply 220VAC	2.5 (1.1)
2-MIC	Master Paging Microphone (add "-CC" for City of Chicago)	3 (1.3)
2-TEL	Firefighters Master Telephone	4 (1.8)
2-AAC	Audio controller (add "-CC" for City of Chicago)	1 (.45)
Wallboxes		
2-WB3	ADT2000 Long Surface Wallbox - Gray finish. For Semi-Flush mounting order trim Kit. See note 1.	20 (9)
2-WB3D	Inner and outer doors for 2-WB3 wallbox. See note 1.	18 (8.2)
2-WB7	ADT2000 Double Wide Surface Wallbox - Gray finish. For semi-Flush mounting order trim Kit. See note 1.	39 (17.7)
2-WB7D	Inner and outer doors for 2-WB7 wallbox. See note 1.	36 (16)
RACCR	Remote Audio Closet Cabinet. Red Finish	19 (8.6)
RACCDR	Door for RACCR wallbox	13 (5.9)
Trim Kits		
2-LFK	Long Semi-Flush Trim Kit for 2-WB3 wallbox. See note 1.	4 (1.8)
2-DFK	Double Wide Semi-Flush Trim Kit for 2-WB7 box. See note 1.	5 (2.3)
<i>Note: 1. Standard finish is gray, red versions are available by adding suffix R to the catalog number e.g. 2-WB3R.</i>		
Related Equipment		
SIGA-AA30	30 Watt Intelligent Audio Amplifier	2 (.9)
SIGA-AA50	50 Watt Intelligent Audio Amplifier	2 (.9)
SIGA-APS	6.4 Amp Power Supply	2.5 (1.1)
SIGA-APS-220	6.4 Amp Power Supply 220Vac	2.5 (1.1)
ATP	Amplifier Terminal Panel - 120V	14 (6.4)
ATP-220	Amplifier Terminal Panel - 220V	14 (6.4)
URSM	Universal Riser Supervisory Module	2 (.9)
RKU-36	19 inch Equipment Rack - 36.75 Usable Space 41.0875H x 22.38W x 18.5D. White finish.	81 (36.8)
RKU-42	19 inch Equipment Rack - 42.0 Usable Space 46.3H x 22.38W x 18.5D. White finish.	89 (40.5)
RKU-61	19 inch Equipment Rack - 61.25 Usable Space 65.6H x 22.38W x 18.5D. White finish.	114 (51.8)
RKU-70	19 inch Equipment Rack - 70.0 Usable Space 74.4H x 22.38W x 18.5D. White finish.	130 (59.1)
RKU-77	19" Equipment Rack - 77.0 Usable Space 81.4H x 22.38W x 18.5D. White finish.	150 (68.2)

